

HIGHLIGHTS

- DIN-rail mounting and screw terminal power connections
- Highly flexible and unique Modbus functionality
- Multiple Modbus master and slave types
- Raw/ASCII Serial and Ethernet device support
- Variable power input eliminates need for power converters
- Dual Ethernet ports for daisy chaining network connections between multiple units
- RoHS Directive 2002/95/EC compliant



Part Number
99521-0



DeviceMaster® UP 4-Port VDC Modbus

The DeviceMaster UP has been designed to meet the demands of today's increasingly diverse Modbus installations.

Control has developed three unique Modbus firmware applications that provide a wide range of Modbus connectivity. Simple connections or complex Modbus networks, you can do it all with a DeviceMaster UP.

Highly flexible and robust, the DeviceMaster UP provides connectivity between a vast array of Modbus controllers and devices. Simplified configuration pages, innovative functionality and informative diagnostic information all make for quick and easy set-up of even the most complex Modbus installations.



SPECIFICATIONS



HARDWARE

Serial Connectors	(4) DB9 Male
Ethernet Ports	(2) 10/100 BaseT
Processor	ARM7 44Mhz
Memory	
8MB	RAM
4MB	Flash
Mounting Options	Panel/Rack
LED Indicators	
Status, Ethernet Link/Activity, Collision, 100MB Ethernet, RX/TX Per Port	
Housing	
Rugged Steel Construction	

ELECTRICAL SPECIFICATIONS

Device Requirements	5 to 30 VDC
Device Consumption	2.5 Watts
External Power Supply	(Included)
Input	
90 to 260 VAC @ 47-63Hz	
Output	
500mA @ 24 VDC	
Surge Protection	15KV

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature*	-37° C to 74°C
Storage Temperature	40°C to 85°C
Humidity (non-condensing)	
System On	20% to 80%
System Off	8% to 80%
Altitude	0 to 10,000 Ft
Heat Output	8.5 BTU/Hr
Mean time between failures	46.2 Years

SERIAL COMMUNICATIONS

Software Selectable	RS-232/422/485
Baud Rates	50 to 230 Kbps
Data Bits	7 or 8
Parity	Odd, Even, None
Stop Bits	1 or 2

COMMUNICATION MODES

Modbus/TCP to Serial or Ethernet TCP/IP
 Modbus/TCP to Modbus/RTU
 Modbus/TCP to raw serial data
 Modbus/RTU Device (Auto Locate and Auto Route)

NETWORK PROTOCOLS

Telnet, HTTP, SNMP, DHCP, RARP, ARP, BOOTP, Ping

REGULATORY APPROVAL MARKS



ODVA Certified
 PIC Certified

EXPORT INFORMATION

Packaged Shipping Weight	7.08lbs
Package Shipping Dimensions	14.9" x 4" x 10.9"
UPC Code	7-56727-99521-0
ECCN	5A992
Schedule B Number	8471.80.1000

REGULATORY STANDARDS

Immunity
 EN55024, EN6100042, EN6100043, EN6100044, EN6100045, EN6100046, EN6100048, EN61000411, IEC 100042, IEC 100043, IEC 100044, IEC 100045, IEC 100046, IEC 100048, IEC 1000411


Emission
 EN55022 & A1:2000 IEC 100032, IEC 100033, CISPR22, ICES003

Safety
 EN60950, IEC 60950, CSA C22.2 No. 50/UL60950

FEATURES

Easy Setup
 SoftwareSelectable Serial Port Interface
 PortVision Remote Management Software
 PLC based or Web based Serial Port Configuration
 Watchdog Reset

4-PORT PIN ASSIGNMENTS

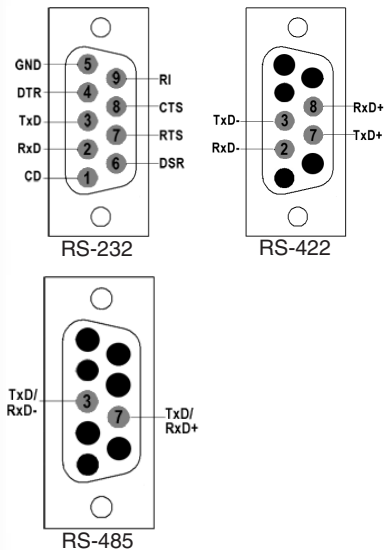

DeviceMaster UP 4-Port Dimensions (in inches)
 Metric (L 27.23cm X W 16cm X H 3.81cm)

ORDERING INFORMATION

99521-0 DeviceMaster UP 4-Port VDC Modbus
 (Power Supply (24VDC, 24 Watt) Included)

PRODUCT SUPPORT & SERVICE INFORMATION

Warranty Information

Control offers a 30-day satisfaction guarantee and 5-year limited warranty.

Sales Support

+1.763.957.6000
 sales@comtrol.com

Technical Support

+1.763.957.6000
 www.comtrol.com/support

Email, FTP, and Web Support

info@comtrol.com
 ftp.comtrol.com
 www.comtrol.com

*We have tested the products to run at these temperatures.