



RocketPort® INFINITY and EXPRESS 32-Port Rackmount Interface

Part Number: 30060-1



KEY FEATURES AND BENEFITS

- Compatible with RocketPort INFINITY and EXPRESS 32-Port Serial Controller cards
- Standard 1U 19" Rackmounting
- RS-232/422/485 Software-Selectable Ports
- Communications Speeds up to 460Kbps
- RoHS2 compliant under CE

PRODUCT DESCRIPTION

Flexible, reliable and high-speed multipoint serial expansion. The next generation RocketPort 32-Port Rackmount Interface delivers 32 RJ45 connections that can be configured for RS-232, RS-422 or RS-485 serial communications and mounts in a standard 1U 19" IT equipment rack. This product is only suitable for use with the

RocketPort INFINITY PCI-X and RocketPort EXPRESS PCIe products and is not compatible with previous RocketPort ISA, PCI, or uPCI products.



ROCKETPORT SPECIFICATIONS

HARDWARE

| | |
|---------------------------------|----------------------|
| Dimensions | 16.75" x 1.75" x 8" |
| Product Weight | 89.3 oz |
| Packaged Shipping Weight | 89.92 oz |
| Enclosure | Black Finished Steel |

ELECTRICAL SPECIFICATIONS

| | |
|-------------------------|--------------------|
| Surge Protection | 15KV @200A for 1ns |
|-------------------------|--------------------|

ENVIRONMENTAL SPECIFICATIONS

| | |
|--|------------------|
| Air Temperature | |
| System On | 0° to 60°C |
| System Off | -20° to 85°C |
| Operating Humidity | |
| | 5% to 95% |
| Altitude | |
| | 0 to 10,000 feet |
| Mean time between failures (MTBF) | |
| | 61.3 years |

SERIAL COMMUNICATIONS

| | |
|----------------------------|------------------|
| Port Communication | (32) RJ45F |
| Software Interfaces | RS-232/422/485 |
| Baud Rate | 300bps-460.8Kbps |

DEVICE DRIVERS

(Determined by RocketPort Card)
 FreeBSD 5
 FreeBSD 6
 QNX® 6.X
 SCO OpenServer™ 5
 SCO OpenServer™ 6
 Linux
 Microsoft® Windows® 7
 Microsoft® Windows® 2008 Server
 Microsoft® Windows® Vista
 Microsoft® Windows Server® 2003
 Microsoft® Windows® XP
 Microsoft® Windows NT® 4.0 (Legacy)
 Microsoft® Windows® 2000 (Legacy)

FEATURES

RoHS 2 compliant under CE
 Rackmount form factor
 Easy Setup
 5 Year Warranty

REGULATORY APPROVALS

Emissions
 Canadian EMC Requirements ICES-003
 European Standard EN55022
 FCC Part 15 Subpart B: Class A limit
 AS/NZS CISPR 22

Immunity
 European Standard EN55024
 IEC 1000-4-2/EN61000-4-2: ESD
 IEC 1000-4-3/EN61000-4-3: RF
 IEC 1000-4-4/EN61000-4-4: Fast Transient
 IEC 1000-4-5/EN61000-4-5: Surge
 IEC 1000-4-6/EN61000-4-6: Conducted Disturbance
 IEC 1000-4-8/EN61000-4-8: Magnetic Field
 IEC 1000-4-11/EN61000-4-11: Dip and Voltage






Safety
 IEC 60950/EN60950 (LISTED)
 CSA C22.2 No. 60950/UL60950 Third Edition

Other
 RoHS2 Compliant

Regulatory Approvals



PINOUTS

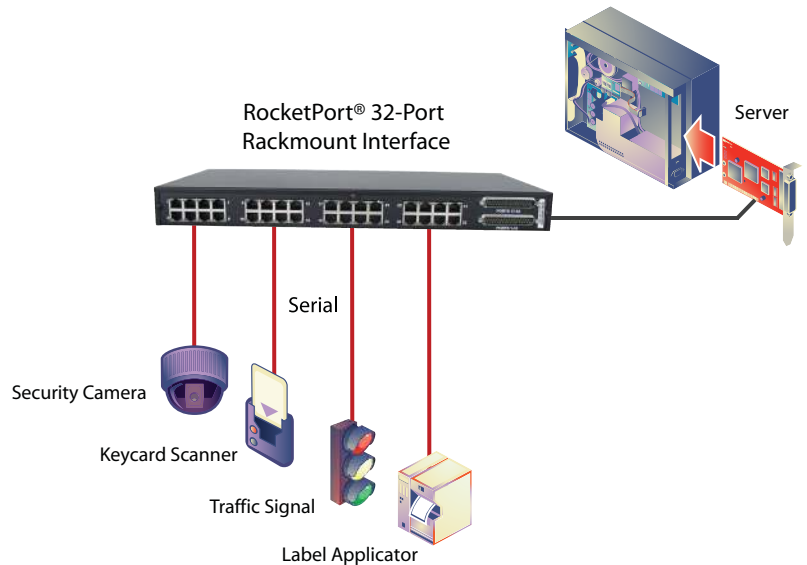

Warranty Information

Control offers a 30-day satisfaction guarantee and 5-year limited warranty.

Sales Support

+1.763.957.6000
 sales@comtrol.com

Technical Support

+1.763.957.6000
 www.comtrol.com/support

Email, FTP, and Web Support

info@comtrol.com
 ftp.comtrol.com
 www.comtrol.com