



## RocketPort® EXPRESS 8-Port SMPTE Card

Part Number: 31320-5

ROCKETPORT

### KEY FEATURES AND BENEFITS

- x1, x2, x4, x8, x12 or x16 lane PCIe connectivity
- Provides eight SMPTE 207M expansion ports
- Supports multiple Control SMPTE interface products for custom solutions
- DTE/DCE Selectable on each port
- PCI EXPRESS bus
- Robust operating system support
- Microsoft WHQL (Windows Hardware Quality Labs) compliant drivers
- Easy driver configuration



### PRODUCT DESCRIPTION

Flexible, reliable and high-speed serial port expansion.

The RocketPort EXPRESS 8-Port SMPTE Card provides eight ports of in-server serial connectivity. It can be used in conjunction with the RocketPort EXPRESS SMPTE Octacable (31330-4), RocketPort EXPRESS 8-Port SMPTE Interface (31325-0) or the RocketPort EXPRESS 8-Port SMPTE Rackmount Interface (31315-5), providing a complete solution for all broadcast applications.

The RocketPort SMPTE Card provides the added flexibility to set the appropriate ports with the DIP switch to DCE or DTE RS-422 serial communications. It is designed for standard and low-profile PCs and servers.

The RocketPort EXPRESS 8-Port SMPTE Card provides

the equipment interface portion of an overall broadcast system, allowing interconnection of programmable and nonprogrammable control and accessory equipment. It allows rapid reconfiguration of a system utilizing up to eight pieces of equipment.

The SMPTE (Society of Motion Picture and Television Engineers) connections comply with the ANSI/SMPTE 207M-1997 Television –Digital Control Interface – Electrical and Mechanical Characteristics Standard. The RocketPort SMPTE product family supports the SMPTE interface system used for the transfer of data and digital control signals. This system allows the connection of production, post-production and/or data transmission equipment, such as video routers, servers, tape decks, keyboards, dimmer racks, video monitors, headphones and broadcast mixing consoles. See back page for a network diagram.



# ROCKETPORT SPECIFICATIONS

## HARDWARE

Board Dimensions	4.7" x 2.6"
Product Weight	3.9 oz

## ELECTRICAL SPECIFICATIONS

Current Consumption	3.3VDC or 700mA
Power Consumption	2.4 W
ESD Surge Protection	Minimum of 15KV for all serial lines

## ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	0 to 60°C
Storage Temperature	-20 to 85°C
Operating Humidity	5% to 95%
NonCondensing	
Altitude	0 to 10,000 Ft
Heat Output	8.2 BTU/Hr
Mean time between failures	32.0 Years

## DEVICE DRIVERS

Linux  
 Microsoft® Windows® 7  
 Microsoft® Windows® 2008 Server  
 Microsoft® Windows® Vista  
 Microsoft® Windows Server® 2003  
 Microsoft® Windows® XP  
 Microsoft® Windows NT® 4.0 (Legacy)  
 Microsoft® Windows® 2000 (Legacy)  
 FreeBSD 5  
 FreeBSD 6  
 QNX 6  
 SCO OpenServer 5  
 SCO OpenServer 6

## SERIAL COMMUNICATIONS

Connector Type	N/A (Requires External Interface or Cable)
Supported Standards	SMPTE 207M
Baud Rates	300 to 921.6 Kbps
Receiver Buffer	512 bytes
Transmit Buffer	512 bytes
Data Bits	5, 6, 7, or 8
Parity	Odd, Even, None
Stop Bits	1, 1.5, or 2

## EXPORT INFORMATION

Packaged Shipping Weight	0.85 lbs
Package Dimensions	9.19" x 7.25" x 2.5"
UPC Code	7-56727-31320-5
ECCN	EAR99
Schedule B Number	8471.80.1000

## REGULATORY APPROVAL MARKS



## REGULATORY STANDARDS


**Immunity**  
 European Standard EN55024  
 IEC 1000-4-2/EN61000-4-2: ESD  
 IEC 1000-4-3/EN61000-4-3: RF  
 IEC 1000-4-4/EN61000-4-4: Fast Transient  
 IEC 1000-4-5/EN61000-4-5: Surge  
 IEC 1000-4-6/EN61000-4-6: Conducted Disturbance  
 IEC 1000-4-8/EN61000-4-8: Magnetic Field  
 IEC 1000-4-11/EN61000-4-11: Dip and Voltage

**Emission**  
 Canadian EMC Requirements ICES-003  
 European Standard EN55022  
 FCC Part 15 Subpart B: Class B limit  
 AS/NZS CISPR 22

**Safety**  
 IEC 60950/EN60950  
 CSA C22.2 No. 60950/UL60950, Third Edition  
 European Standard: RoHS 2 compliant under CE

## FEATURES

RoHS 2 compliant under CE  
 Low-Profile or Standard Height  
 Easy Setup  
 5 Year Warranty

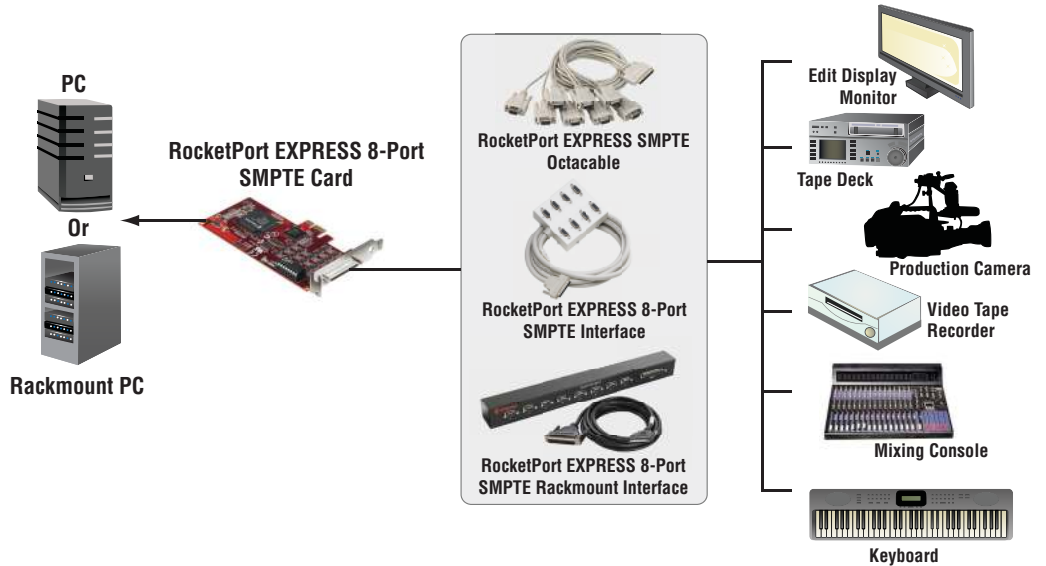

## Warranty Information

Comtrol offers a 30-day satisfaction guarantee and 5-year limited warranty.

## Sales Support

+1.763.957.6000  
 sales@comtrol.com

## Technical Support

+1.763.957.6000  
 www.comtrol.com/  
 support

## Email, FTP, and Web Support

info@comtrol.com  
 ftp.comtrol.com  
 www.comtrol.com