



DeviceMaster® EIP-2304

Part Number: 99611-8



DEVICE SERVER

KEY FEATURES AND BENEFITS

- DIN rail mounting
- Low profile, compact housing facilitates easy installation and mounting
- Wide DC input voltage range (5-30 volts)
- Redundant power input for fail-safe power
- Wide operating temperature range (-40° to 75°C)
- RS-232/422/485 software selectable interfaces
- Software selectable termination resistors for RS-232/422/485
- DB9 Male serial connectors
- Dual 10/100 Ethernet Ports
- Screw terminal power connector
- 25KV surge protection for serial ports
- Application compatibility supports native COM, TTY, or TCP/IP socket communication modes
- Web-based or Windows configuration makes setup and management changes quick and easy
- Real-time e-mail event notification alerts administrator of potential connection and security issues
- PortVision® DX for quick setup and remote management
- Security via SSL & SSH connections, SSL serial data stream encryption
- NEMA TS2 Certified

PRODUCT DESCRIPTION

The DeviceMaster UP 4-Port DB9 2E is the newest model in Control's popular line of DeviceMaster serial device servers. This product can be used to network-enable two serial devices on any Ethernet network and are ideal for applications in:

- Traffic and Transportation
- Power Utility
- Industrial Automation
- Material Handling
- Any project that requires serial-to-Ethernet communication with DIN rail-based equipment installations

The DeviceMaster UP 4-Port DB9 2E includes DIN-rail mounting and

screw terminal power connections for convenient installation. It offers both wide DC input voltage range (5-30 volts) and wide operating temperature range (-40° to 75°C), so it operates reliably in a variety of challenging physical environments. It provides redundant DC power input for fail-safe power.

The DeviceMaster UP 4-Port DB9 2E is National Electrical Manufacturers Association (NEMA) TS2 compliant. And with 2 Ethernet ports, you can daisy-chain or cascade devices together for a cleaner layout, a faster installation and a more cost-effective solution (no need for multiple Ethernet switches or star topology layouts).

The DeviceMaster UP supports software selectable RS-232, RS-422 and RS-485 serial communications at standard baud rates from 300bps to 230Kbps. Software selectable termination resistors also provided to enable easy and reliable installations.



connect. communicate. control.

DEVICEMASTER SPECIFICATIONS

HARDWARE

Interface Specification

10/100BASE-T Ethernet

Memory

SDRAM 32 MB
Flash 8 MB

Enclosure

UL94-V0 Plastic

Installation Method

DIN Rail (35mm)

LED Indicators

Status, Ethernet Port Link and Activity

Enclosure Dimensions

4.6" x 3.9" x 1.8"
116.8 x 99.1 x 45.7 cm

Product Weight

0.45 lbs
204.12 g

ELECTRICAL SPECIFICATIONS

DC Input Voltage

5-30 VDC

Power Consumption (max)

3.0W

Power Input Redundancy

Dual Redundant Power Input

ESD Surge Protection

Provides minimum of 25KV protection for all serial lines. All Ethernet components are rated to 1.5KV magnetic surge protection.

ENVIRONMENTAL SPECIFICATIONS

Air Temperature

System On -40° to 75°C
System Off -40° to 85°C

Operating Humidity (Non-Condensing)

0% to 95%

Altitude 0 to 10000 Feet
0 to 3,048 m

Mean time between failures

42.3 Years

SERIAL COMMUNICATIONS

Connector Type

DB9 Male

Number of Ports

4

Interface Standard

RS-232
RS-422
RS-485, 4-wire, Master
RS-485, 4-wire, Slave
RS-485, 2-wire

Termination Resistor

Software controllable 120Ω termination resistors available for each transmit and receive differential pair on every port. The 120Ω termination resistors can be enabled between TX+ and TX- OR RX+ and RX- or both on every port

Baud Rates

300 bps to 230Kbps

Transmit Buffer

4.5KB

Receive Buffer

4.5KB

Data Bits

5, 6, 7 or 8

Parity

odd, even, mark, space, or none

Stop Bits *

1, 1.5, or 2

Flow Control

Hardware, Software, None

* Stop bit 1.5: Supported only when used with 5 data bits

ETHERNET SPECIFICATIONS

Number of Ports

2

Speed

10/100Mbps

Connector Type

(1) RJ45F Auto MDI/MDI-X

LED

Ethernet Link (Green)
Ethernet Activity (Amber)

Ethernet Specific Features

Ethernet packet switching, Auto Negotiation, Link/Activity Status LED

Network Protocols

ARP, BOOTP, DHCP/RARP, HTTP, HTTPS, SSH, SSL/TLS, SNMP (MIB-II), Telnet, and TFTP, and supports IP multicast data transmission

ETHERNET/IP FEATURES

Supported PLCs

Including but not limited to:
Allen Bradley: ControlLogix, CompactLogix, FlexLogix, SoftLogix, SLC 5/05, PLC-5, and MicroLogix Models

Web Page Configuration

- Three methods of receive communication to the PLC – Write-to-Tag/File, Write-to-Tag/File-Synced, and Polling
- Connectivity – Ethernet/IP to serial and Ethernet TCP/IP raw/ASCII devices
- Connectivity to high-speed devices. Supports message rates as high as 50 updates per second when receive mode is configured to Write-to-Tag/File.
- Vendor Specific CIP objects – configuration, data transfer, and statistics
- Large received packet support – up to 1518 bytes serial and 2048 bytes Ethernet TCP/IP
- Received packet size control – truncate or drop oversized packets
- Message Throttling – ensures PLC can process each received data packet
- Intelligent packet identification – start and end of transmission character detection/ appending

Diagnostics

Yes

Electronic Data Sheets (EDS)

Yes

Sample PLC Programs

Yes

FEATURES

SNMP Support

Monitoring Only

Other Software Features

PortVision DX remote management

Manufacturer's Warranty

5 Years

EXPORT INFORMATION

Packaged Shipping Weight

0.85 lbs
386 g

Package Dimensions

5-11/16" x 5-11/16" x 3-3/8"
144.46 x 144.46 x 85.73mm

UPC Code

7-56727-99611-8

Country of Origin

USA

ECCN

5A992

Schedule B Number

8471.80.1000

DEVICE DRIVERS

Linux

Microsoft® Windows® XP through Windows 10

REGULATORY STANDARDS

Emissions

FCC Part 15 Subpart B
Class A limit
Canadian EMC Requirements
ICES-003

European Standard EN61000-6-4

European Standard EN55022

AS/NZS CISPR 22

Immunity

European Standard EN61000-6-2

European Standard EN55024:

IEC1000-4-2/EN61000-4-2: ESD
IEC1000-4-3/EN61000-4-3: RF
IEC1000-4-4/EN61000-4-4: Fast Transient/ Burst
IEC1000-4-5/EN61000-4-5: Surge
IEC1000-4-6/EN61000-4-6: Conducted Disturbance
IEC1000-4-8/EN61000-4-8: Magnetic Field
IEC1000-4-11/EN61000-4-11: Voltage Dips and Voltage Variations

Safety

UL 61010-1, UL 61010-2-201

CSA C22.2 No. 61010-1-12

CSA C22.2 No. 61010-2-201:14

Other


European Standard RoHS2 Certified

NEMA TS2

REGULATORY APPROVALS



PINOUT DIAGRAMS

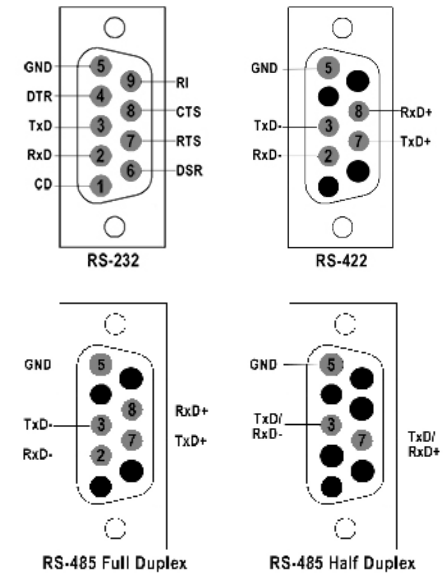

Warranty Information

Control offers a 30-day satisfaction guarantee and 5-year limited warranty.

Sales Support

+1.763.957.6000
sales@comtrol.com

Technical Support

+1.763.957.6000
www.comtrol.com/support

Email, FTP, and Web Support

info@comtrol.com
ftp.comtrol.com
www.comtrol.com